

AGRU SMOOTH LINER[®] GEOMEMBRANE



For more information about Agru America
and our products, visit agruamerica.com



Tough and flexible, HDPE and LLDPE Agru Smooth Liner® is the material of choice for containment applications and landfill caps. The chemically resistant material provides consistent thickness and delivers optimum weld speed and weld quality in the field.

HDPE and LLDPE Agru Smooth Liner® meets or exceeds GRI GM13/17 test values, frequency of testing and test methods and requirements established by the environmental waste containment and civil engineering communities.



Agru Smooth Liner® - 60mm Pond Application




HDPE Product Supply Range

- Available in thicknesses of 30-100 millimeter
- Available in black or black/white

LLDPE Product Supply Range


- Available in thicknesses of 40-100 millimeter
- Available in black or black/white

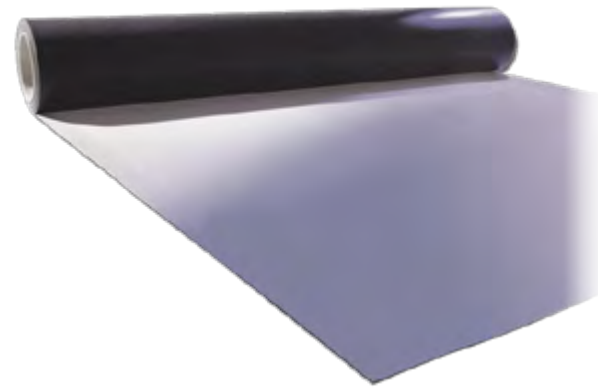

The Best Protection for Your Future

The flat die extrusion process allows for the best thickness control of any geomembrane in the industry and the most consistent properties across the roll width. The consistent surface structuring or texture gives Agru Smooth Liner® geomembranes reproducible friction angle values with efficiencies of more than 95 percent.

All Agru Smooth Liner® material is rolled on 23' wide plastic cores to ensure ease of installation, eliminating the problem of collapsed cores.



For more information on Agru Smooth Liner®
and other Agru products, please reach out to
us.



Worldwide Excellence in Plastics and Geosynthetics | agruamerica.com

(800) 373-2478 | Fax: (843) 527-2738
500 Garrison Road, Georgetown, SC 29440 USA

salesmkg@agruamerica.com

twitter.com/agruamerica

linkedin.com/company/agru-america-inc

facebook.com/agruamerica

This information is provided for reference purposes only and is not intended as a warranty or guarantee. Agru America, Inc. assumes no liability in connection with the use of this information.