


**AGRU  
PFA HP  
Sheet Plain**

**EXTRUDED**

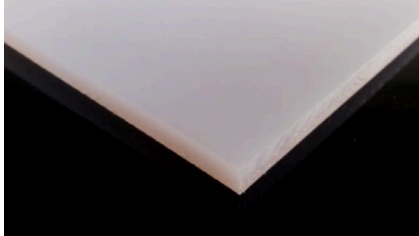

Raw Material: PFA Polymer

Color: Natural / opaque

Density: 2.15 g/cm<sup>3</sup>

Surface Protection: Protection foil on both sides

Traceability: Fabricator's label including lot number on each sheet

Certificates: ISO 9001 and ISO 14001

Product Code	Sheet Thickness [mm]	
	Thickness	Tolerance
4H.600.2012.04	4	± 0.20
4H.600.2012.06	6	± 0.25
4H.600.2092.10	10	± 0.40
4H.600.2092.12	12	± 0.45
4H.600.2090.15	15	+ 0.30 / + 1.50
4H.600.2090.20	20	+ 0.30 / + 1.50

All information and statements submitted on this paper are based on our current knowledge and experience. In view of the many factors that may affect processing and application, these data do not relieve users from responsibility of carrying out their own tests and experiments; neither do they imply any legally binding assurance of certain properties or of suitability for a specific purpose. It is the responsibility of those to whom we supply our products to ensure that any proprietary rights and existing laws, standards, and legislation are observed. The statements about all product relevant properties in our valid catalogues, documents and price lists have to be considered.



Commercial Registration No. 171838d  
Commercial Registration Court. LG Steyr  
RZ00AT2L560

Raiffeisenbank Bad Hall  
IBAN: AT78 3456 0000 0210 1061

**PFA-HP - 4H**

