


IPS  
Butt Tees

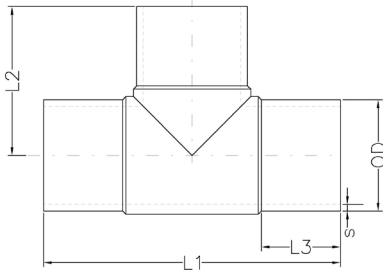

- Molded from black PE 100/ 4710 resin & NSF-61 certified
- Complies with the following product standards: ASTM D2513, D3261, D3350, and AWWA C906

**SDR 9 (STANDARD DIMENSION RATIO) 250 PSI (WORKING PRESSURE AS 73.4° F)**

Product Code	Nominal Diameter (inch)	L1 (inch)	L2 (inch)	L3 (inch)	s (inch) Min Wall	OD (inch)	Weight (lbs.)
R-TEES-R9-02.00	2" IPS	8.48	4.41	2.50	0.26	2.38	0.985
R-TEES-R9-03.00	3" IPS	11.50	5.63	2.85	0.39	3.50	2.44
R-TEES-R9-04.00	4" IPS	13.28	5.98	3.05	0.50	4.50	4.09
R-TEES-R9-06.00	6" IPS	18.13	N/A	4.18	0.74	6.63	16.58

**SDR 7 (STANDARD DIMENSION RATIO) 335 PSI (WORKING PRESSURE AS 73.4° F)**

Product Code	Nominal Diameter (inch)	L1 (inch)	L2 (inch)	L3 (inch)	s (inch) Min Wall	OD (inch)	Weight (lbs.)
R-TEES-R7-02.00	2" IPS	8.48	4.41	2.50	0.34	2.38	1.20
R-TEES-R7-03.00	3" IPS	11.50	5.63	2.85	0.50	3.50	3.10
R-TEES-R7-04.00	4" IPS	13.28	5.98	3.05	0.64	4.50	5.29
R-TEES-R7-06.00	6" IPS	18.13	6.63	4.18	0.95	6.63	12.83
RF-51.115.0010.07	10" IPS	25.63	12.81	5.55	1.54	10.74	65

Notes:

1. All dimensions shown are nominal and subject to manufacturing tolerance OD and minimum wall are determined in accordance with ASTM standards. Drawing shown is an approximation only.
2. Please refer to DOT pressure requirements for natural gas applications.
3. Fittings are marked to meet standards to which the product is produced and labeled.