


IPS Butt Reducers

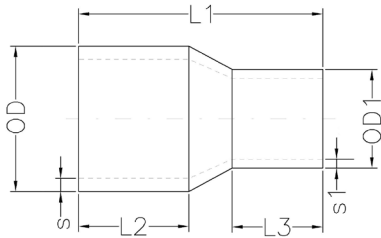

- Molded from black PE 100/ 4710 resin & NSF-61 certified
- Complies with the following product standards: ASTM D2513, D3261, D3350, and AWWA C906

SDR 9 (STANDARD DIMENSION RATIO) 250 PSI (WORKING PRESSURE AS 73.4° F)

Product Code	Nominal Diameter (inch)	L1 (inch)	L2 (inch)	L3 (inch)	s (inch) Min Wall	OD (inch)	s1 (inch) Min Wall	OD 1 (inch)	Weight (lbs.)
RF-REDU-R9-02X01	2" x 1"	6.15	3.00	1.525	0.26	2.375	0.15	1.315	0.500
RF-REDU-R9-03X02	3" x 2"	6.90	3.18	2.53	0.39	3.500	0.26	2.38	0.79
RF-REDU-R9-04X02	4" x 2"	8.00	3.00	2.40	0.50	4.500	0.26	2.38	1.27
RF-REDU-R9-04X03	4" x 3"	7.58	3.00	3.00	0.50	4.500	0.39	3.50	1.51
RF-REDU-R9-06X04	6" x 4"	8.00	3.00	3.00	0.74	6.625	0.50	4.50	5.10
RF-REDU-R9-08X06	8" x 6"	11.5	4.25	4.25	0.96	8.625	0.74	6.63	9.90

SDR 7 (STANDARD DIMENSION RATIO) 335 PSI (WORKING PRESSURE AS 73.4° F)

Product Code	Nominal Diameter (inch)	L1 (inch)	L2 (inch)	L3 (inch)	s (inch) Min Wall	OD (inch)	s1 (inch) Min Wall	OD 1 (inch)	Weight (lbs.)
RF-REDU-R7-02X01	2" x 1"	6.15	3.00	1.525	0.34	2.375	0.19	1.315	0.860
RF-REDU-R7-03X02	3" x 2"	6.90	3.18	2.53	0.50	3.50	0.34	2.38	1.16
RF-REDU-R7-04X02	4" x 2"	8.00	3.00	2.40	0.64	4.50	0.34	2.38	1.95
RF-REDU-R7-04X03	4" x 3"	7.58	3.00	3.00	0.64	4.50	0.50	3.50	1.97
RF-REDU-R7-06X04	6" x 4"	8.00	3.00	3.00	0.95	6.63	0.64	4.50	6.04
RF-REDU-R7-08X06	8" x 6"	11.5	4.25	4.25	1.23	8.63	0.95	6.63	11.57

Notes:

- All dimensions shown are nominal and subject to manufacturing tolerance OD and minimum wall are determined in accordance with ASTM standards. Drawing shown is an approximation only.
- Please refer to DOT pressure requirements for natural gas applications.
- Fittings are marked to meet standards to which the product is produced and labeled.